


ViewCast - world class streaming hardware and software trusted by video professionals since 1994.

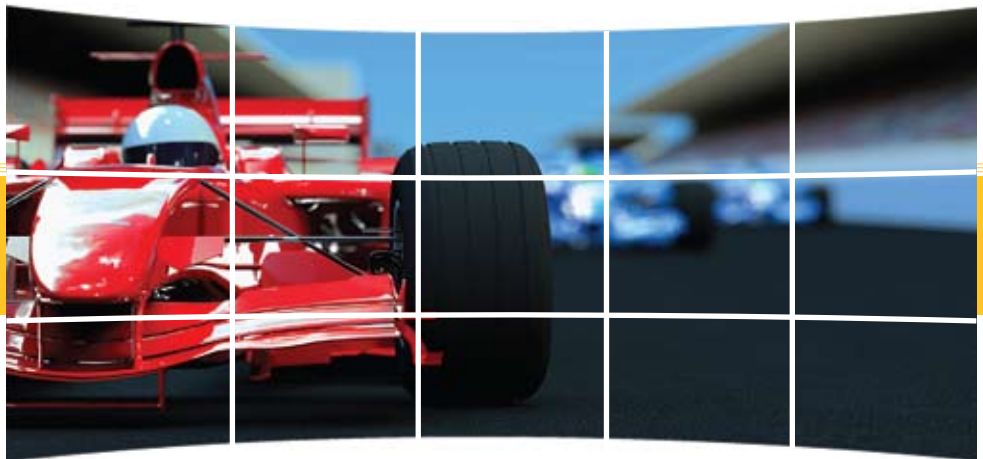

Ideal Users and Applications

• BROADCASTERS

For Internet TV and mobile video, especially those with HD requirements.

• GOVERNMENT

For open meetings and PEG needs, due to broadcast standards, especially those with HD requirements.

• GLOBAL OEM SYSTEMS INTEGRATORS

Including content owners and aggregators, needing to re-purpose professional broadcast HD and SD content for IP video distribution and video-on-demand (VOD) applications. It is also perfect for ingesting HD/SD video for archiving and/or transcoding workflows.

Osprey-700e HD

Designed for Live in HD with SD Switching On-the-Fly

ViewCast is proud to add its first high-definition (HD) card to the Osprey® family: the Osprey-700e HD – with standard-definition (SD) switching on-the-fly! Legendary Osprey performance – now in HD – with the latest PCI Express® technology for high-flying performance.

Already making a splash, the Osprey-700e HD won TV Technology magazine's 2007 STAR Award and was featured in HD Video Pro magazine's February 2008 issue.

The Osprey-700e HD offers solid bandwidth required for high-resolution video capture in:

- Applications for a wide range of SD and HD standard in resolutions up to 1080i(60/59.94/50 Hz).
- Accepts industry-standard SD and HD SDI in a single half-height PCIe card.
- Utilizes the high-speed PCI Express bus
- SDI input supports up to eight independent embedded stereo audio pairs in all SD and HD modes.

Exclusive Designed for Live Adaptive Features

With the Osprey-700e HD card and the newest Designed for Live™ feature distinguishes the Osprey-700e HD from many cards used for ingesting video into video editing systems or other applications, enabling you to:

- Switch On-the-Fly Between SD and HD:
 - Accepts a variety of SD and HD video standards and
 - Will automatically adapt – without interruption when the signal format changes between any of the supported SD and HD modes.
- Optimized for live streaming
- Icon/logo Bitmap Overlay with transparency and positioning controls

- Specify constant output format with changing input format:

- Can automatically adapt (size and scale) the incoming video to match the selected output parameters.
- You can freely switch between a live HD studio feed, SD promo clip from a playback server, back to live HD, etc. — without touching a thing!

- Instantly publish your live streaming content. We call it Instant VOD, allowing you to:

- Configure separate live and archived versions of the same live content
- Separate logos, separate sizing, cropping, scaling, etc. — to minimize or eliminate post-processing time and resources. (Requires Osprey SimulStream®)
- Automatically detect and adapt on-the-fly when the input video format changes from movie frame rates to TV frame rates

Multiple Streams Per Input


Purchase the Osprey-700e HD with Osprey SimulStream and you can:

- Feed multiple encoders at the same time.
- Use with a variety of available streaming codecs to easily create and manage live streams.
- Supports SD and HD streams in Windows Media® and is Silverlight™ compatible.
- Support SD streams in:
 - RealVideo®, Adobe® Flash® and MPEG-4
- Create multiple streams of the same type with completely independent settings for sizing, scaling, logos, and bit rates.

Industry-proven performance

Over 300,000 Osprey cards are out in the marketplace worldwide being used in a wide variety of broadcast, commercial and industrial applications. You'll find Osprey capture cards in mission-critical applications throughout the world.

**Osprey
700e HD**

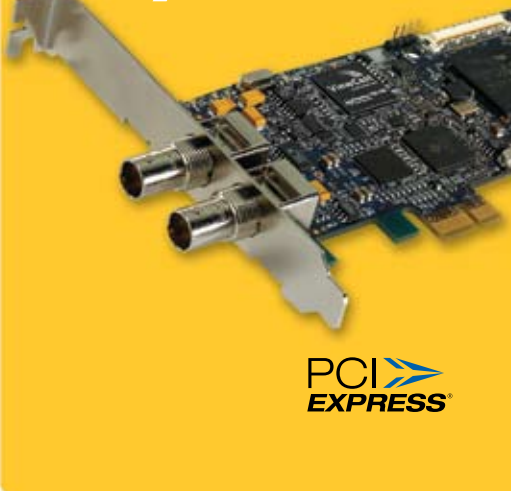


PCI
EXPRESS®

Think performance!



Osprey-700e HD Video Capture Card

ViewCast - world class streaming hardware and software trusted by video professionals since 1994.

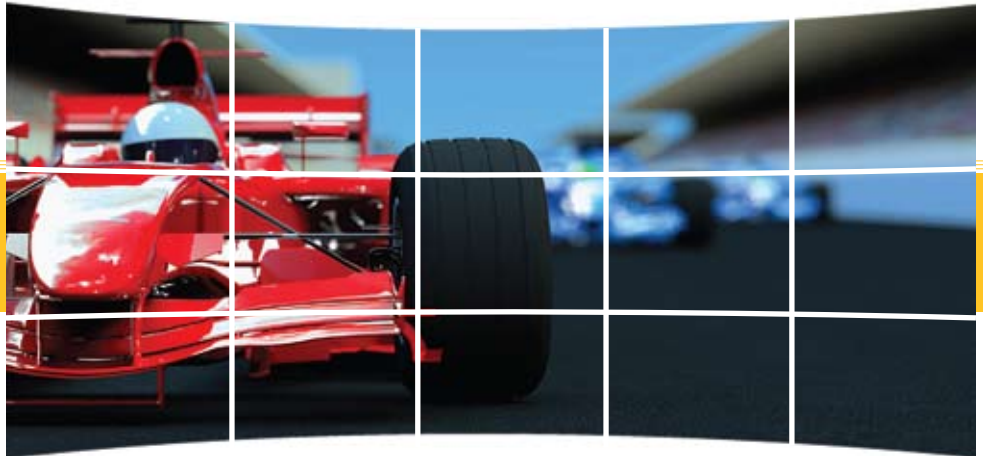

Professional Features for Broadcasters

Features, such as color space conversion, automatic telecine detection and processing, and automatic optimization for changing motion content make this a perfect choice for broadcast professionals. We've added the broadcaster-requested feature "Loss of Video Detection" that lets you automatically substitute internally-generated SMPTE color bars with an optional text overlay.

Optimized for PCI Express

PC manufacturers have adopted the "be better served" philosophy by upgrading

to the PCI Express bus, which offers the latest high-throughput internal bus architecture. The best PC graphics cards use this bus because it unleashes the power of modern multi-core PC engines.


ViewCast chose the PCI Express bus for the Osprey-700e HD for the same reasons – unfettered access to all PC resources. No bottlenecks, no mysterious glitches, no unexplained hiccups, no random data collisions. Just smooth, unadulterated power. Power that can support multiple Osprey PCIe cards in one system for the ultimate in high-density, multi-channel streaming.

Features

- Extraction of Closed Captioning and Teletext
- Wide Screen Signaling (WSS) flag for 16x9 capture
- Customized messaging superimposed on color bars upon loss of video signal, with customizable text font, color and placement
- Osprey SimulStream ready
- Video Processing Applications:
 - Advanced Deinterlace choices
 - Spatial Downsampling
 - Temporal Downsampling
 - RGB, YUV Format Conversion
 - Contrast, Brightness, Hue and Gamma adjustment
 - Dynamic Format Change
 - Inverse Telecine
 - Logo/Bitmap Overlay
 - Cropping
- PCIe (x1) – compatible with x1, x4, x8, and x16 PCIe slots
- Drivers available for Microsoft® Windows® operating systems (OS).



Osprey-700e HD Video Capture Card

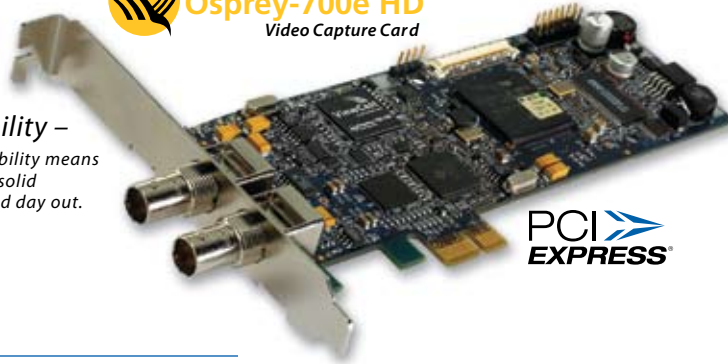

Rock-Solid Stability –

Legendary Osprey reliability means you can count on rock-solid performance, day in and day out.

Key Attributes

- Accepts both Standard Definition and High-Definition inputs
- Automatically adapts between SD and HD signals via Designed for Live features
- High-powered PCI Express bus for maximum performance
- Osprey SimulStream option enables:
 - Completely independent settings for sizing, scaling, and bit rate speeds, plus logo overlays with dynamic positioning
 - A multitude of simultaneous video format outputs, including MPEG-4, RealNetworks, Windows Media and Adobe Flash
 - Instant Video-On-Demand (VOD), allowing your live stream to become instantly available as VOD content
- Low-profile architecture for form-factor constrained environments
- Professional broadcaster features, such as Loss of Video Detection, color space conversion, automatic telecine detection and processing, and automatic optimization for changing motion content

Specifications

- Video/Audio Input/Output: SDI
- Video Signal: SDI Standard Definition and High-Definition
- Audio Signal: Embedded SDI Audio (16 Channels or 8 Stereo Pair)
- Video Input Formats:
 - NTSC
 - PAL
 - HD 720p 60
 - HD 720p 59.94
 - HD 1080i 60
 - HD 1080i 59.94
 - HD 1080i 50

© 2008 ViewCast Corporation. ViewCast, Niagara, Osprey, SimulStream, GoStream, EZStream and Niagara SCX are registered trademarks of ViewCast Corporation or its subsidiaries. All other trademarks are the property of their respective owners. Product specifications and availability may change without notice. Osprey-700eHD-2pg



USA | 3701 W. Plano Parkway, Suite 300 | Plano, Texas 75075-7840 | 972-488-7200 | 800-540-4119
UK | Worting House Church Lane | Basingstoke Hampshire RG23 8PX U.K. | +44 1256 345610

www.viewcast.com